

MRNW-LED

Construction:



- Steel chassis and cage
- Diffuser is .10 extruded white acrylic

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; keyhole slots
- Top and bottom white acrylic lens - standard
- Optional photocell (21) increases fixture depth 1 ½"
- **Build America, Buy America Act Compliant**
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components




MRNW-616

MRNW-626

DIM 'A'	M.C.
16"	8"
26"	13"

Type:	
Job Name:	

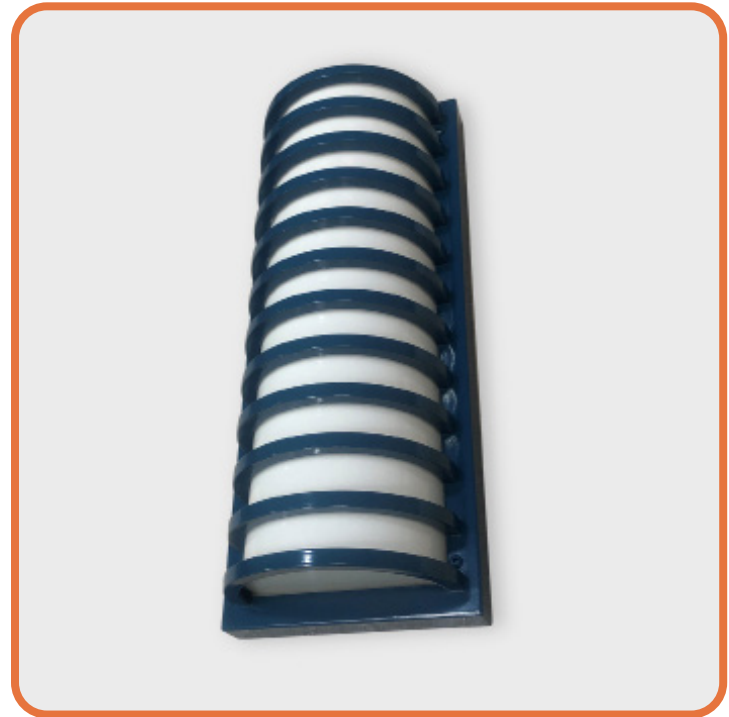

ORDERING INFORMATION

Example: MRNW-616-LED-O1C-4-U11-WSA

MRNW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
616-LED	O1C	9	1210	0-10v	NO	2 3000K 3 3500K 4 4000K 5 5000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder P2 Brushed Alum U11 Azul Blue	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) 21 Photocell - See Notes -01 120 volt -02 277 volt 39 J-Box with Knockouts Optional Voltage -347V Input voltage to 347v Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
626-LED	O2C	18	2420	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286
www.lightwayind.com • sales@lightwayind.com



Revision: 08/28/2025