

TURW-LED

Construction:

- Steel housing and chassis
- Bottom lens is clear smooth acrylic; optional white frosted acrylic


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Center lockup – hardware include
- Optional all aluminum construction (option 42)
- ADA compliant
- Dark Sky compliant
- BUG Rating: B1-U0-G0
- Optional Anti-Ligature Compliant
- Build America, Buy America Act Compliant
- UL and CUL listed **WET** location
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

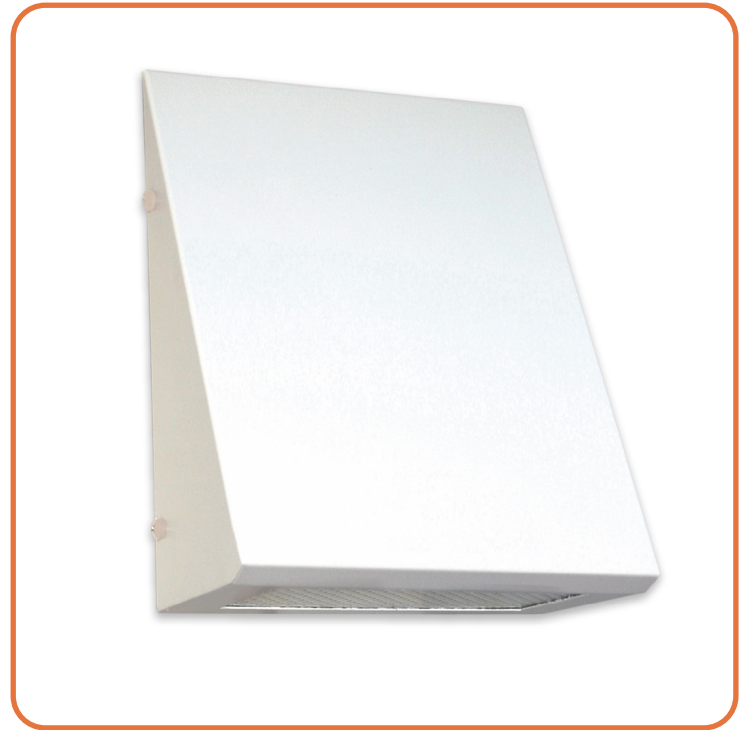

TURW-9-LED

Height - 9"
Width - 7"
Depth - 4"



ORDERING INFORMATION

Example: TURW-9-LED-F1C-4-W2-CSA

TURW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder M16 Antique Brass P2 Brushed Alum P9 Brushed Nickel	CSA Clear Smooth Acrylic Optional Lens Material (See Price List) WFA White Frost Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v Consult Factory 42 All Aluminum Construction AL Anti-Ligature (tamper proof screws)
9-LED	F1C	10	1518	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
www.lightwayind.com • sales@lightwayind.com

