

SRLH-LED

Construction:

- Aluminum housing and chassis
- Diffuser is white smooth polycarbonate
- Optional alabaster acrylic

Light Source:

- LED
- Dimming (0 - 10v) to 10% **Included**

Notes:

- Canopy mounts to J-Box with integral safety cable
- Custom mounting heights and cage designs available
- Standard is a 3' chain with 6' of cord
- Optional single stem 45-degree swivel standard
- Standard bottom lens with optional solid cover
- UL and CUL listed **DAMP** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	




WALL

CEILING

PENDANT

OUTDOOR

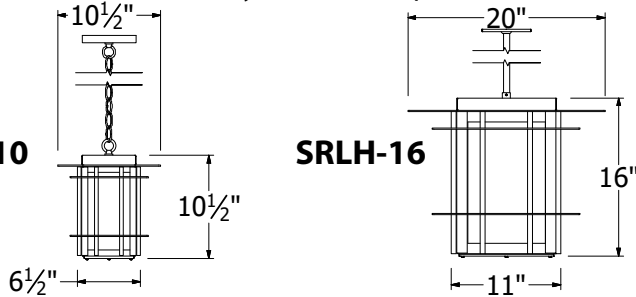

ORDERING INFORMATION

Example: SRLH-16-LED-O4C-4-Z3-AHA-WBL-520AH

--	--	--	--	--	--	--	--

Size	LED					Kelvin	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star				
10-LED	O4B	29	4000	0-10v	NO	2 3000K 4 4000K	B1 Satin Black Z1 Satin Bronze Z3 Text Bronze	WSP White Smooth Polycarbonate	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included)
	1E26		0	TRIAC/ELV	NO				
16-LED	O4C	36	4840	0-10v	NO	Optional 3 3500	Optional (See Price List)	Optional Lens Material (See Price List)	WBL White Bottom Lens (Standard) SSB Solid Bottom Cover
	1E26		0	TRIAC/ELV	NO				
							W1 Yolk W2 Gloss White W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	AHA Amber Honey Alabaster BAA Beige Alabaster OAA Opal Alabaster	(Suspension Systems-See Notes) CHN - 3' of chain and 6' cord (STD) ISLM45 -Single Stem 45 degree swivel 4AC__ - Aircraft Cable w/SJ cord WSJ - White "SJ" Cord BSJ - Black "SJ" Cord



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

