

# MEDW-600-LED

## Construction:

- Steel housing and chassis
- 3/8" Sq Accent bars and rings are extruded aluminum


## Light Source:

- LED
- Dimming to 10% **Included**


## Notes:

- Keyhole slots top and bottom
- Solid front shield allowing no forward light
- Down light only complies with Dark Sky requirements
- Optional photocell (21) increases fixture depth 1 1/2"
- Optional battery backup increases fixture depth 1 1/2"
- BUG Rating: B10U0G0
- Build America, Buy America Act Compliant
- UL and CUL listed **WET** location
- LED Components
  - Replaceable Module
  - CRI > 90
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components


Type:	
Job Name:	



## DESIGN OPTIONS (Choose your cage design)

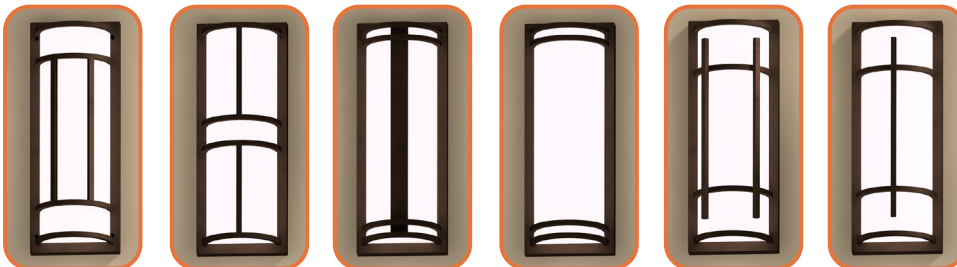

MERW-A    MERW-B    MERW-C<sup>D1</sup>    MERW-D    MERW-E    MERW-F<sup>D1</sup>

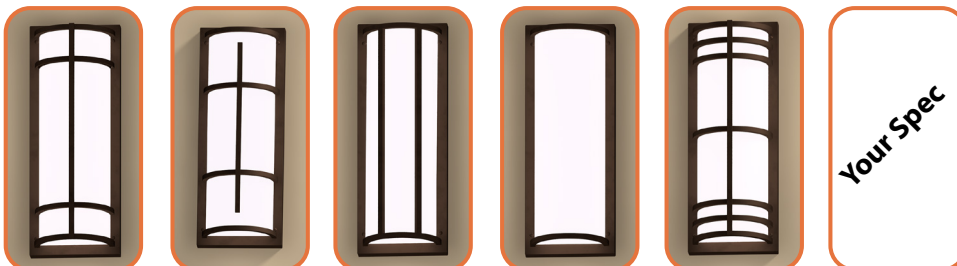


MERW-G<sup>D1</sup>    MERW-H<sup>D1</sup>    MERW-I    MERW-J    MERW-K<sup>D1</sup>    MERW-X

<sup>(1)</sup> Contact factory for assistance

### Fixture Overall Dimensions

- "H" - 12" - 16" - 18" - 26" - 38" - 50"
- "W" - 6 1/2"
- "D" - 4"
- "D1" - 4 3/8"
- "MC" - 6" - 8" - 9" - 13" - 19" - 25"
- See 900 or 1100 Series for other width options



28435 Industry Drive., Valencia, California 91355  
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201  
 www.lightwayind.com • sales@lightwayind.com



## ORDERING INFORMATION

Example: MEDW-626-LED-G-F2B-4-B1

### MEDW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
						2 3000K	A	B1 Satin Black	<b>Optional Cage Accents</b> (See Page 2)  <b>Material</b> F Filigree P Perforated Screen M Wire Mesh W Waffle Pattern  <b>Style</b> SC Screen Complete CC Center Complete EC Ends Complete CH Center Half OX Custom	DIM LED dimming driver (0 - 10v)
						3 3500K	B	B2 Text Black		21 Photocell - Specify voltage
612-LED	F2B	12	1180	0-10v	NO	4 4000K	D	Z1 Satin Bronze		01 - 120 volt
616-LED	F2B	12	1180	0-10v	NO	5 5000K	E	Z3 Text Bronze		02 - 277 volt
618-LED	F2B	12	1180	0-10v	NO		F	W1 Yolk White		
626-LED	F2B	12	1180	0-10v	NO		G	W2 Gloss White		
638-LED	F2B	12	1180	0-10v	NO		H	W3 Text White		
650-LED	F2B	12	1180	0-10v	NO		I	T4 Shimmer Gray		
							J	M13 Anod Silver		OCCHFB Concealed Occupancy Sensor <i>See Sensor Resource Sheet</i> <i>(0-10v Driver Engine only)</i>
							K	T6 Pewter		Optional Voltage
							X	<b>Optional</b> (See Price List) M17 Brass Powder P2 Brushed Alum P9 Brushed Nickel M16 Antique Brass		-347V Input voltage to 347v
										<b>Battery Backup Options</b> <i>(0-10v Driver Engine only)</i> BB10 10 Watts (1170lm) for 90-Minutes

