

LCRW-LED

Construction:



- Aluminum housing and chassis
- Diffuser is .10 extruded white acrylic

Light Source:


- LED
- Dimming (0 - 10v) to 10% **Included**
- Light emits front detail and sides

Notes:

- Keyhole slots top and bottom
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components



Height - 26" 50"
Width - 12"
Depth - 4"

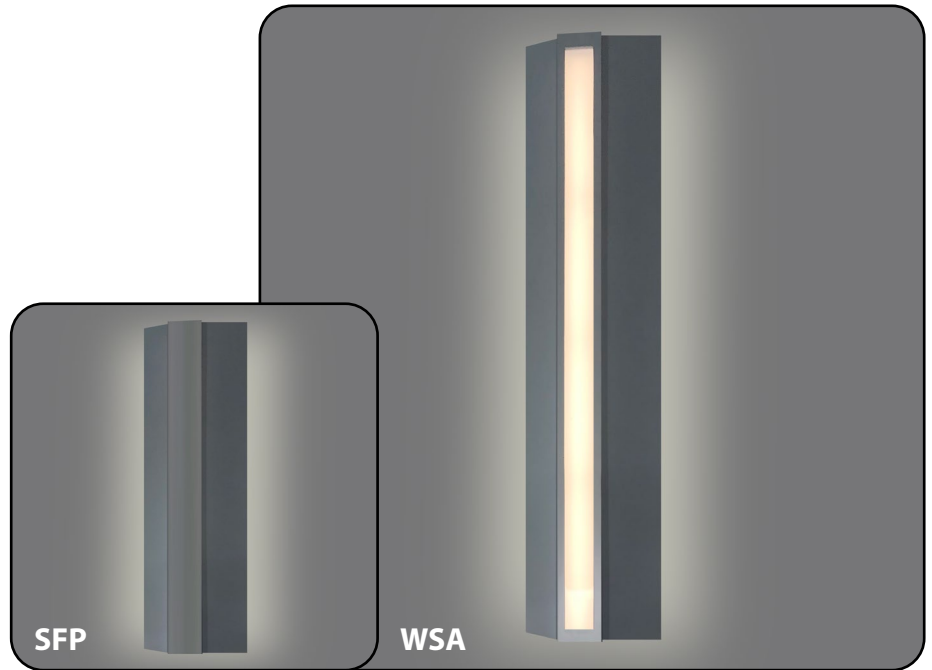

ORDERING INFORMATION

Example: LCRW-26-LED-U-O2C-4-M13-WSA

LCRW

Size	LED					Kelvin	Finish	Front Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K			
26-LED	O2C	18	2420	0-10v	NO		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WSA White Smooth Acrylic SFP Solid Front Panel	DIM LED dimming driver (0 - 10v)
50-LED	O4C29	29	3412	0-10v	NO				
	O4C	36	4840	0-10v	NO				
							Optional (See Price List) M17 Brass Powder M20 Tuscan Sun		



28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
www.lightwayind.com • sales@lightwayind.com



Revision: 04/16/2025