

# MDIW-700-LED

## Construction:

- Steel chassis and cage
- Diffuser is .10 extruded white acrylic


## Light Source:

- LED
- Dimming to 10% **Included**

## Notes:


- Integral mounting plate; keyhole slots
- Top and bottom white acrylic lens - standard
- Optional photocell (21) increases fixture depth 1 1/2"
- Build America, Buy America Act Compliant
- UL and CUL listed **WET** location
- LED Components
  - Replaceable Module
  - CRI > 90
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

Type:	
Job Name:	

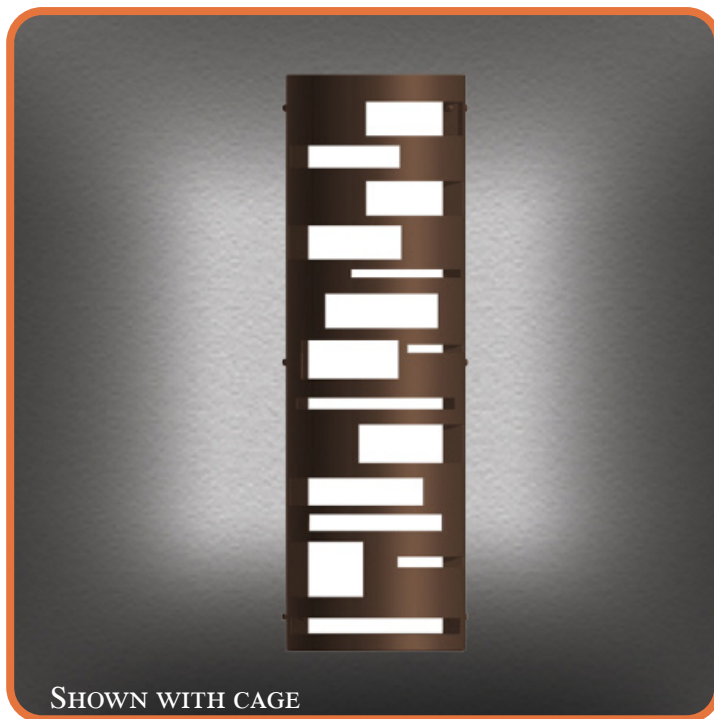

## MDIW-XXX

Height- 16" - 26" - 38" - 50" - 60"  
 Width - 6 3/4"  
 Depth- 4"  
 MC - 8" - 13" - 19" - 25" - 30"

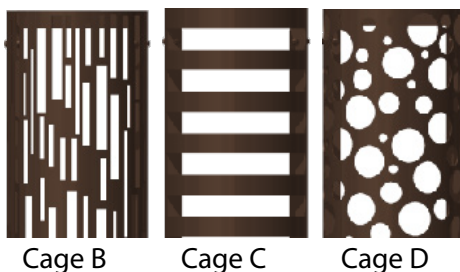

## ORDERING INFORMATION

Example: MDIW-726-LED-A-O2C-4-Z3-WSA

## MDIW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
716-LED	O1C	9	1210	0-10v	NO	2 3000K	A	B1 Satin Black	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v)
726-LED	O2C	18	2420	0-10v	NO	3 3500K	B	B2 Text Black		
738-LED	O3C	27	3630	0-10v	NO	4 4000K	C	Z1 Satin Bronze		
750-LED	O4C	36	4840	0-10v	NO		D	Z3 Text Bronze		
							X	W1 Yolk White		21 Photocell - See Notes
								W2 Gloss White		-01 120 volt
								T4 Shimmer Gray		-02 277 volt
								M13 Anod Silver		Optional Voltage
								T6 Pewter		-347V Input voltage to 347v
								W13 Pearl Beige		
								<b>Optional</b>		<b>Battery Backup Options</b>
								(See Price List)		(Available with 0-10v only)
								M17 Brass Powder		BB10 10 Watts (1170lm) for 90-Minutes
								P2 Brushed Alum		
								P9 Brushed Nickel		



28435 Industry Drive., Valencia, California 91355  
 : 800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201  
 www.lightwayind.com • sales@lightwayind.com

