

# MITW-LED

**Construction:**

- Steel Housing and chassis
- Diffuser UV-stabilized, high impact resistant, DR acrylic


**Light Source:**

- LED
- Dimming to 10% **Included**

**Notes:**

- Integral mounting plate; Hardware Included
- Optional photocell (21) increases fixture depth 1 1/2"
- UL and CUL listed **WET** location
  - Build America, Buy America Act Compliant
  - CRI > 90
  - Universal 120/277 volt standard
  - 5-Year Warranty on LED Components

<b>Type:</b>	
<b>Job Name:</b>	

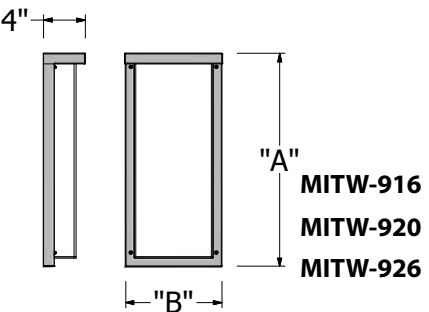

DIM 'A'	DIM 'B'	M.C.
16"	9"	8"
20"	9"	10"
26"	9"	13"



## ORDERING INFORMATION

Example: MITW-920-LED-O6B29-3-Z3-WSA

**MITW**

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K		<b>B1</b> Satin Black <b>Z1</b> Satin Bronze <b>Z3</b> Text Bronze <b>W1</b> Yolk <b>W2</b> Gloss White <b>W3</b> Text White <b>B2</b> Text Black <b>T4</b> Shimmer Gray <b>M13</b> Anod Silver <b>T6</b> Pewter <b>W13</b> Pearl Beige  <b>Optional</b> (See Price List) <b>P2</b> Brushed Alum <b>P9</b> Brushed Nickel	<b>WSA</b> White Smooth Acrylic	<b>DIM</b> LED dimming driver (0 - 10v) Dimming to 10% <b>(Included)</b>  <b>21</b> Photocell - Specify voltage 01 - 120 volt 02 - 277 volt  <b>42</b> All Aluminum Construction   <b>Battery Backup Options</b> (Available with 0-10v only) <b>BB10</b> 10 Watts (1170lm) for 90-Minutes
<b>916-LED</b>	<b>O3C18</b>	18	2420	0-10v	NO					
<b>920-LED</b>	<b>O6B29</b>	29	4000	0-10v	NO					
<b>926-LED</b>	<b>O6C18</b>	18	2420	0-10v	NO					
	<b>O6C36</b>	36	4840	0-10v	NO					



28435 Industry Drive., Valencia, California 91355  
 800-325-4448 /661-257-0286  
 www.lightwayind.com • sales@lightwayind.com

