

MRDW-LED

Construction:

- Steel housing and chassis
- Solid shield stands off of wall providing wall wash on all sides

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Bi-directional keyhole slots
- Optional custom shields
- Optional photocell (-21)
- Optional battery backup (-BB10)
- Optional Aluminum construction (-42)
- **Build America, Buy America Act Compliant**
- UL and CUL listed **WET** location
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

MRDW-15

Height - 15"

Width - 9"

Depth - 6 1/2"

MRDW-24


Height - 24"

Width - 9"

Depth - 7"

Type:

Job Name:

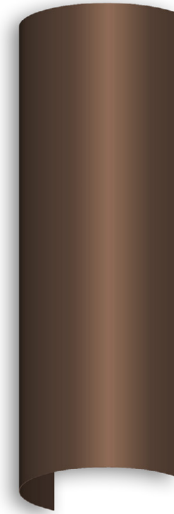

ORDERING INFORMATION

Example: MRDW-15-LED-O2A-4-Z3-NA-42

MRDW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
15-LED	O1A	6	800	0-10v	NO	1 2700K		B1 Satin Black	N/A Solid Shield	DIM LED dimming driver (0 - 10v) DIMLED Line Voltage /TRIAC/ELV/120v See Resource Page
	O2A	12	1600	0-10v	NO	2 3000K		B2 Text Black		
24-LED	O2A	12	1600	0-10v	NO	3 3500K		Z1 Satin Bronze		42 All Aluminum Construction
	O2A	12	1600	0-10v	NO	4 4000K		Z3 Text Bronze		
	O2A	12	1600	0-10v	NO	5 5000K		W1 Yolk White		
	O2A	12	1600	0-10v	NO			W2 Gloss White		
	F2E	29	4694	DIM or DIMLED	NO			T4 Shimmer Gray		21 Photocell - See Notes -01 120 volt -02 277 volt
								M13 Anod Silver		
								T6 Pewter		Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
								Optional (See Price List)		
								M17 Brass Powder		
								P2 Brushed Alum		
								P9 Brushed Nickel		



28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
www.lightwayind.com • sales@lightwayind.com



Revision: 06/09/2025