

DSYV-LED

Construction:


- Steel chassis and end caps
- Diffuser is white smooth acrylic

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Mounts to standard J-Box with slotted anchor holes
- Optional battery backup (36" or 48" only)
- Vertical or Horizontal mounting
- ADA compliant
- UL and CUL listed **DAMP** location
- Build America, Buy America Act Compliant
- Optional UL and CUL listed **WET** Available
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - L70: >60,000Hrs
 - 5-Year Warranty on LED Components

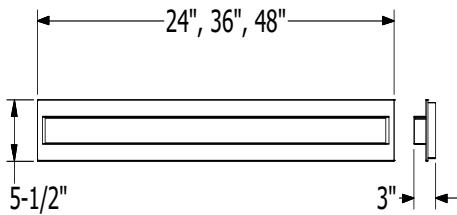

Type:	
Job Name:	



ORDERING INFORMATION

Example: DSYV-36-LED-O3C-2-W1-WSA

DSYV

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 3 3500K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White W3 Text White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) M17 Brass Powder	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) WET Wet listed version OCCHFA Concealed Occupancy Sensor <i>See Sensor Resource Sheet</i> Optional Voltage -347V Input voltage to 347v Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minute
24-LED	O2C	18	2420	0-10v	NO					
36-LED	O3C	27	3630	0-10v	NO					
48-LED	O4C	36	4840	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
 800-325-4448 /661-257-0286
 www.lightwayind.com • sales@lightwayind.com

