

VERC-LED

Construction:

- Steel housing and chassis
- Diffuser is .080" thick white textured or smooth polycarbonate.
- Optional amber, beige or opal alabaster are .080" thick acrylic


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Center lockup – hardware included
- Custom cage styles available
- Optional battery backup
- UL and CUL listed **DAMP** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

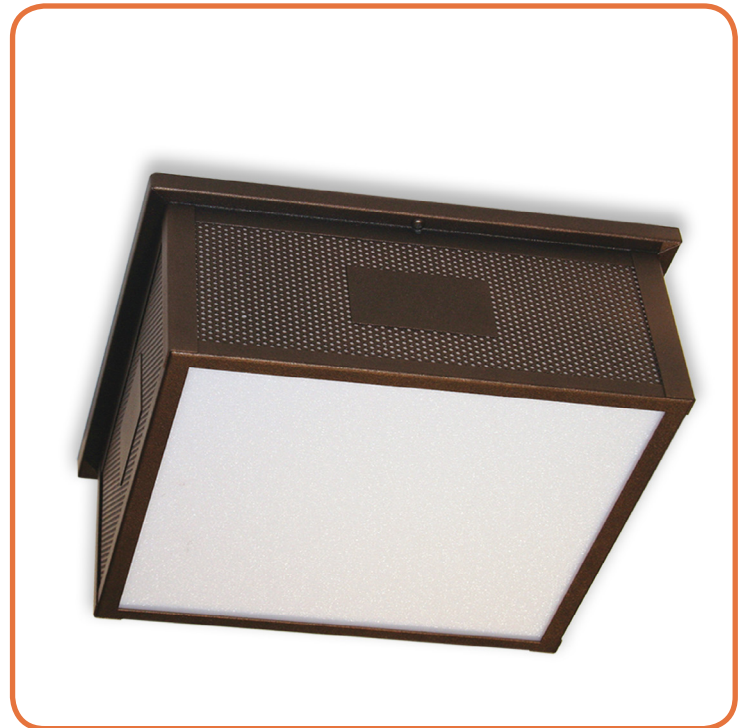

VERC-12

Height - 5"
Width - 11 1/2"

VERC-14

Height - 5"
Width - 14"



ORDERING INFORMATION

Example: VERC-12-LED-F1P-4-Z3-WTP

VERC

Size	LED	Watts	Source Lumens	Dimming	Energy Star	Kelvin	Cage	Finish	Diffuser	Options
12-LED	F1L	9	1400	0-10v	YES	2 3000K 4 4000K		B1 Satin Black	WTP White Textured Polycarbonate	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page ES Energy Star listed components 90CRI Consult Factory OCCHFA Concealed Occupancy Sensor See Sensor Resource Sheet Optional Voltage -347V Input voltage to 347v Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minute
	F1O	10	1065	TRIAC/ELV	YES	Optional 3 3500K		Z1 Satin Bronze		
	F1P	15	1724	TRIAC/ELV	YES			W1 Yolk White	Optional Lens Material (see Price List) AHA Amber Honey Alabaster BAA Beige Alabaster OAA Opal Alabaster	
	F1K	13	2115	0-10v	YES			W2 Gloss White		
14-LED	F1K	13	2115	0-10v	YES				T4 Shimmer Gray	
	F1P	15	1724	TRIAC/ELV	YES	M13 Anod Silver				
	F1Q	23	2540	TRIAC/ELV	YES	T6 Pewter				
	1E26		0	TRIAC/ELV	NO	W13 Pearl Beige				
								Optional (See Price List) M17 Brass Powder		



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

