

ORAW-LED

Construction:

- Perforated aluminum shield; steel chassis
- Diffuser is white textured polycarbonate behind perforated shield


Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Keyhole slots or center lockup for standard J-box
- Custom cage styles available
- Open top and bottom for up and down light
- ADA compliant
- Optional Battery Backup
- Build America, Buy America Act Compliant
- UL and CUL listed **DAMP** location
- LED Components
 - Replaceable Module
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

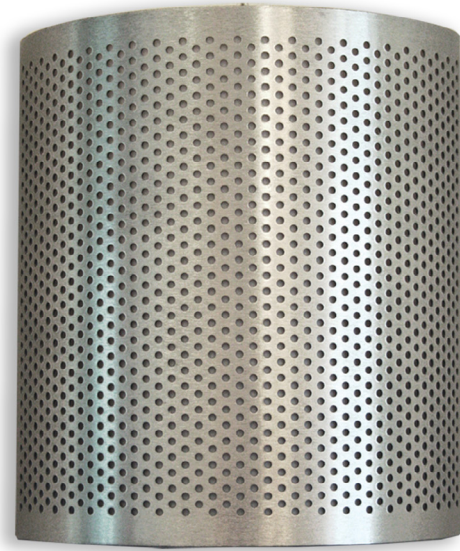

ORAW-11-LED

Height - 11"
Width - 10"
Depth - 4"



ORDERING INFORMATION

Example: **ORAW-11-LED-F1H-4-P2-POS**

ORAW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
11-LED	F1H	9	1400	0-10v	YES	2 3000K 3 3500K 4 4000K		P2 Brushed Alum B1 Satin Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk W2 Gloss White W3 Text White B2 Text Black T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige Optional (See Price List) P9 Brushed Nickel	POS Perforated Aluminum Shield with White Textured Polycarbonate	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page ES Energy Star listed components T24 Title 24/JA8 Compliant (F10 & F1P configuration only) OCCHFB Concealed Occupancy Sensor (O2A Configuration Only) See Sensor Resource Sheet Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
	F1O	10	863	TRIAC/ELV	YES					
	F1P	15	1361	TRIAC/ELV	YES					
	O2A	12	1600	0-10v	NO					
	F1J	20	2820	0-10v	YES					



28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
www.lightwayind.com • sales@lightwayind.com

