

CKNW-LED

Construction:

- Steel housing and chassis
- Clear prismatic polycarbonate lens behind shield


Light Source:

- LED

Notes:

- Integral mounting plate; keyhole slots left and right
- Optional Photocell – specify voltage
- Optional 10% up light and open down light
- Optional 100% down light and no up light
- Optional Battery backup
- UL and CUL listed **WET** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	

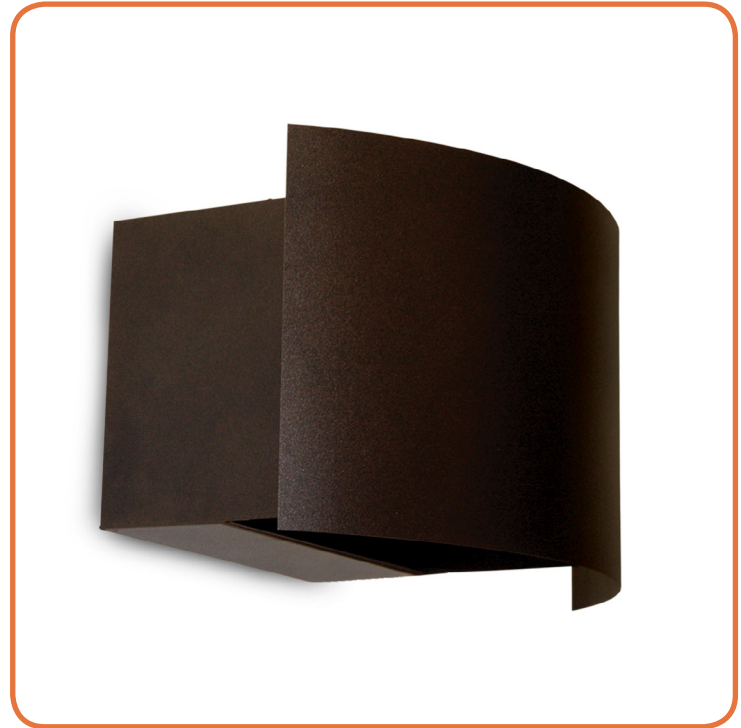

CKNW-9

Height - 9"

Width - 16 1/4"

Depth - 10 3/4"



ORDERING INFORMATION

Example: CKNW-9-LED-02A-2-Z3-CPP-U/D

CKNW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
9-LED	02A	12	1600	0-10v	NO	2 3000K 4 4000K		B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White W3 Text White T4 Shimmer Gray M13 Anod Silver T6 Pewter	CPP Clear Prismatic Poly-carbonate	DIM LED dimming driver (0 - 10v) 21 Photocell - <i>See Notes</i> -01 120 volt -02 277 volt P10 10% Up-Light U/D Up/Down Light Only (<i>Standard</i>) UPD Down Light Only 42 Aluminum Pan (11" & 14" only) Optional Voltage -347V Input voltage to 347v 90CRI Consult Factory Battery Backup Options (<i>Available with 0-10v only</i>) BB10 10 Watts (1170lm) for 90-Minutes
						Optional 3 3500K		Optional (See Price List) M17 Metallic Brass		



28435 Industry Drive., Valencia, California 91355
 West Coast Sales: 800-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
 East Coast Sales: 866-350-0991 • fax 866-490-5754
 www.lightwayind.com • sales@lightwayind.com

