

MERW

Series LED

Architectural cylinder wall sconces with interchangeable cages, in 6", 9" and 11" widths and heights up to 50".

MERW 900 Series • retail colonnade

One fixture family, every scale of façade. The MERW pairs a rugged steel housing and UV-stabilized, impact-resistant DR acrylic diffuser with clean 3/8" extruded-aluminum cage bars — so a single design language can run from a narrow entry pier to a two-story storefront.

9,680

LUMENS MAX

90+

CRI

10%

DIMMING, 0-10V

5-yr

LED WARRANTY

IDEALLY SUITED FOR

01 Mixed-use & multifamily

Entries, amenity walls and street-level façades where a 4"-deep 600 Series stays ADA-friendly.

02 Retail & fuel centers

Pilasters and storefront piers — tall 38" and 50" bodies read from the parking lot.

03 Walkways & colonnades

Rhythm lighting along covered sidewalks, arcades and canopy columns.

04 Hospitality & dining

Warm 3000K, high-CRI light flatters stone, brick and guests at the door.

05 Office & campus

Consistent look across buildings with one family in three widths.

06 Public & funded work

Build America, Buy America compliant (600 & 900 Series) for municipal and grant-funded projects.



MERW 600 • MIXED-USE ENTRY



MERW 600 • PEDESTRIAN PATH



MERW 1100 • CONVENIENCE & FUEL RETAIL



Specify your MERW

STEP 1 · CHOOSE A WIDTH

MERW 600 SERIES

6½" WIDE

Depth	4" (ADA)
Heights	12 – 50"
Output	1,210 – 4,840 lm
Power	9 – 36 W

Slim profile for entries, corridors and accessible routes.

MERW 900 SERIES

9½" WIDE

Depth	5½"
Heights	14 – 50"
Output	1,210 – 9,680 lm
Power	9 – 72 W

The all-rounder for piers, columns and retail façades.

MERW 1100 SERIES


11¼" WIDE

Depth	6½"
Heights	10 – 50"
Output	1,600 – 9,680 lm
Power	12 – 72 W


Maximum presence on tall pilasters and large-scale fronts.

STEP 2 · PICK A CAGE DESIGN

Same 12 designs across all three widths

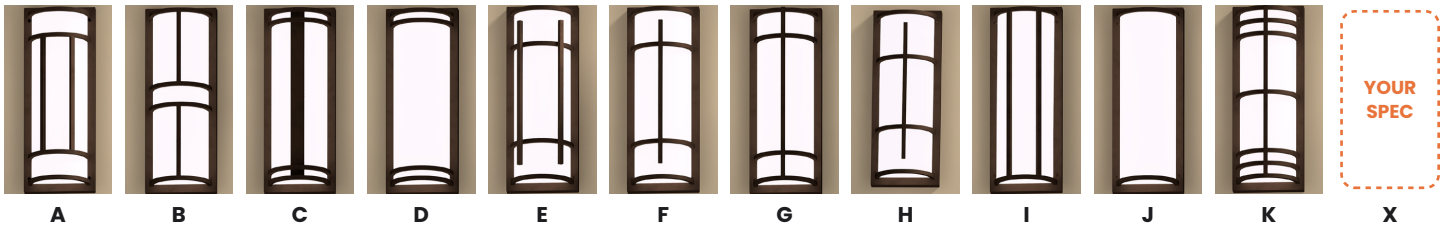

STEP 3 · FINISH & ACCENTS

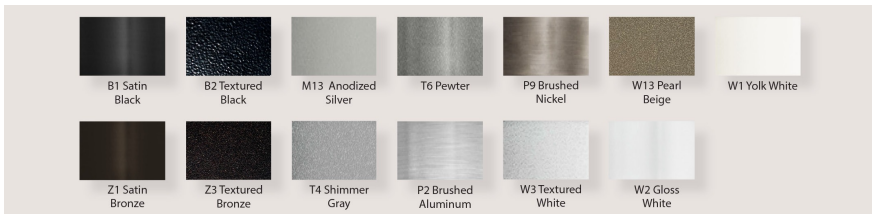

10 standard finishes; P2, P9 & M17 Brass available as premium options.

Optional cage accents add a screen band to the cage:

LOCATION

Screen Complete · Center Complete · Center Half · Ends Complete

MATERIAL

Solid · Perforated · Wire Mesh · Waffle · Custom

STANDARD ON EVERY MERW

- Steel housing & chassis; 3/8" extruded-aluminum cage bars
- UV-stabilized, high-impact DR acrylic diffuser; white top & bottom lenses
- Replaceable LED module, CRI > 90, 3000K / 3500K / 4000K
- Universal 120–277V, 0–10V dimming to 10% included
- UL & cUL listed for wet locations; keyhole mounting slots
- 5-year warranty on LED components


OPTIONS

- BB10 battery backup — 10 W, 1,170 lm for 90 minutes
- 21 photocell (120V or 277V) — adds 1½" depth
- ALC aluminum lens cover — eliminates up/down light
- 42 all-aluminum construction · 39 J-box with knockouts
- ES Energy Star listed components; TRIAC/ELV drivers on select sizes
- Custom cages, accents and lengths — consult factory

HOW TO ORDER

MERW – 926 – LED – O2C – 3 – B – Z1 – WSA

SERIES SIZE LED PACKAGE 3500K CAGE FINISH DIFFUSER



Specifications from Lightway MERW 600/900/1100 spec sheets, rev. 11/14/2024; subject to change. ADA depth applies to the 600 Series. Build America, Buy America compliance listed for 600 & 900 Series; Energy Star on select LED packages.