

STNW-LED

Construction:

- Steel housing and chassis
- Diffuser is white smooth acrylic

Light Source:


- LED
- Dimming to 10% **Included**

Notes:

- Center lockup – hardware included
- Solid top and bottom (standard configuration)
- Optional top lens and/or bottom lens
- Optional side lenses
- Custom cage styles available
- UL and CUL listed **damp** location
- LED Components
 - Replaceable Module
 - CRI > 80
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:

Job Name:

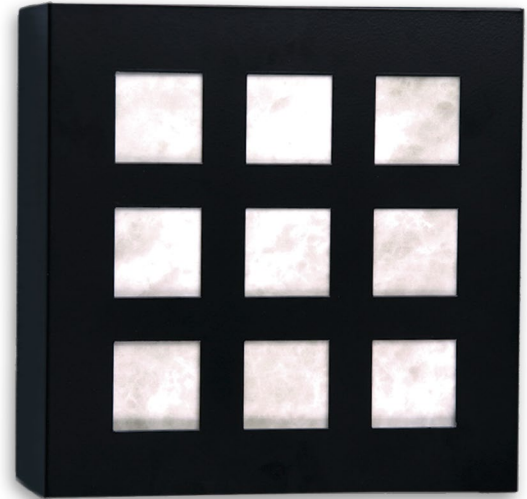

Shown with Cage D



Cage A



Cage B



Cage C

Height - 12"
Width - 12"
Depth - 4"



ORDERING INFORMATION

Example: STNW-12-LED-F1K-4-D-B1-WSA-BL-TL

STNW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star	2 3000K 4 4000K	A B C D	B1 Satin Black B2 Text Black Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v See Resource Page
12-LED	F1H	9	1400	0-10v	YES	Optional 3 3500K	X	Optional (See Price List) M17 Brass Powder M16 Antique Brass P2 Brushed Alum P9 Brushed Nickel	Optional Lens Material (see Price List) AHA Amber Honey Alabaster BAA Beige Alabaster OAA Opal Alabaster	ES Energy Star listed components T24 Title 24/JA8 Compliant (F10 & F1P configuration only) 90CRI Consult Factory SL Side lenses BL Bottom Lens TL Top Lens
	F1O	10	863	TRIAC/ELV	YES					
	F1P	15	1361	TRIAC/ELV	YES					
	F1K	13	2115	0-10v	YES					



28435 Industry Drive., Valencia, California 91355
800-325-4448 /661-257-0286
www.lightwayind.com • sales@lightwayind.com



Revision: 12/11/2025