




B1 Satin
Black




B2 Textured
Black



M13 Anodized
Silver




T6 Pewter




W13 Pearl
Beige




W1 Yolk White



Z1 Satin
Bronze




Z3 Textured
Bronze



T4 Shimmer
Gray



W3 Textured
White



W2 Gloss
White



28435 Industry Drive., Valencia, California 91355
 00-325-4448 / 661-257-0286 • fax 800-323-2346 / 661-257-0201
www.lightwayind.com • sales@lightwayind.com



LCLH-LED

Construction:

- Bottom Diffuser is a White Textured Acrylic
- Side Diffuser is a Translucent Bonded Linen Material with a variety of color options.
- Canopy and housing are steel with a powder coated finish

Light Source:

- LED
- Dimming to 10% **Included**


Notes:

- Mounting Kit Included for standard J-box
- Multiple canopy and stem options available.
- Custom overall heights available
- The LCLH has a typical leadtime of 6-weeks, consult with factory for any minimum order quantities and setup fees
- Build America, Buy America Act Compliant
- UL and CUL listed **DAMP** location
- LED Array
 - Replaceable Module
 - CRI > 90
 - Dimming (10% or 1%)
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components
- For a ceiling flush mounted version see the **LCLC**



Type:	
Job Name:	




DIFFUSER OPTIONS

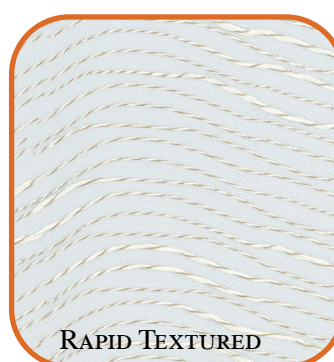


LCLH-LED

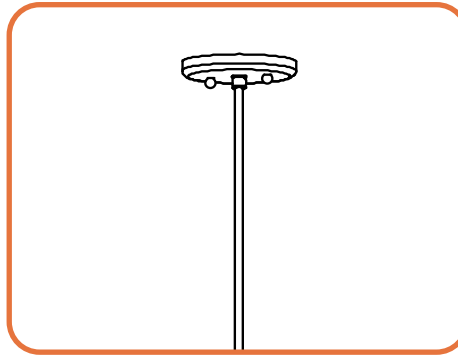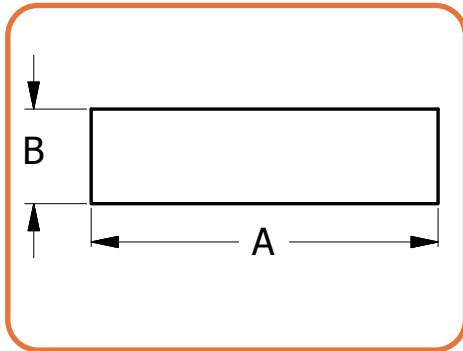


STEM OPTION -1S15

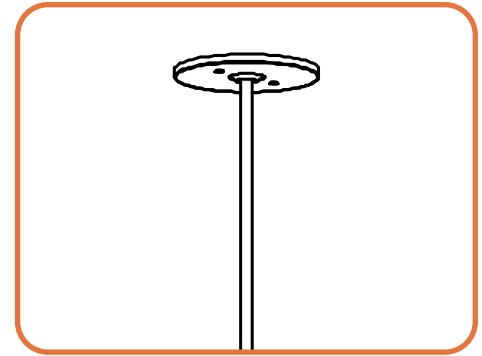

STEM OPTION -1SLM45

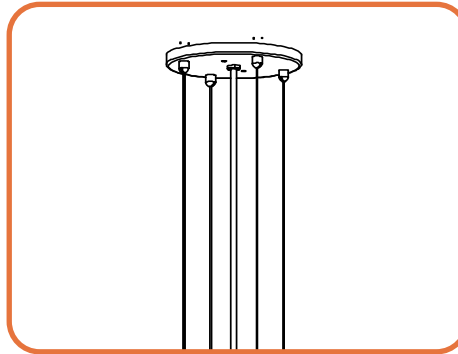

STEM OPTION -AIRCRAFT
CABLE WITH CORD-(4AC-xSJ)

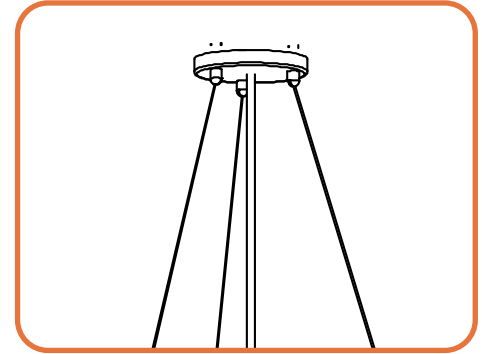

STEM OPTION -AIRCRAFT
CABLE WITH CORD-(3AC-xSJ)

	DIM 'A'	DIM 'B'	OAH
LCLH-12	12.25"	4.5"	12"
LCLH-15	15"	4.5"	12"
LCLH-19	19"	5.25"	12"
LCLH-24	24"	8"	15"
LCLH-30	30"	8"	24"
LCLH-36	36"	8"	24"

ORDERING INFORMATION

Example: LCLH-15-LED-F1Q-4-W2-CTA-DIM-1SLM45-12OAH

LCLH

Size	LED	Watts	Source Lumens	Dimming	Energy Star	Kelvin	Cage	Finish	Diffusers	Options
12-LED	F1L	9	1400	0-10v	YES	2 3000K 3 3500K 4 4000K		B1 Satin Black	WLA White Linen Acrylic	(Suspension Systems) Please list Over All Height
	F1O	10	863	TRIAC/ELV	YES			B2 Text Black		
	F1P	15	1361	TRIAC/ELV	YES			Z1 Satin Bronze Z3 Text Bronze W1 Yolk White W2 Gloss White T4 Shimmer Gray M13 Anod Silver T6 Pewter W13 Pearl Beige		
15-LED	F1K	13	2115	0-10v	YES			Optional (See Price List)	CTA Chocolate Textured Acrylic	1S15 -Single Stem 15 degree swivel 1SLM45 -Single Stem 45 degree swivel 4AC-(4) Aircraft Cable 3AC-(3) Aircraft Cable DIM LED dimming driver (0 - 10v) DIMLD Line Voltage /TRIAC/ELV/120v ES Energy Star listed components T24 Title 24/JA8 Compliant (F10, F1P & F1Q configuration only)
	F1P	15	1361	TRIAC/ELV	YES			M17 Brass Powder		
	F1Q	23	2057	TRIAC/ELV	YES			Optional Trim Options (Consult Factory)		
19-LED	L1A	36	4000	0-10v	NO			BLA Black Linen Acrylic	RTA Rapid Textured Acrylic	OCCHFA Concealed Occupancy Sensor See Sensor Resource Sheet
	F1Q	23	2057	TRIAC/ELV	YES			Bottom Diffuser		
24-LED	L1A	36	4000	0-10v	NO				WTA White Textured Acrylic	Battery Backup Options (Available with 0-10v only) BB10 10 Watts (1170lm) for 90-Minutes
30-LED	O4C	36	4840	0-10v	NO					
36-LED	O8C	72	9680	0-10v	NO					
	O12C	107	14520	0-10v	NO					



28435 Industry Drive., Valencia, California 91355
800-325-4448 /661-257-0286 • fax 800-323-2346 /661-257-0201
www.lightwayind.com • sales@lightwayind.com

