

MINW Series



Bill Russ
Photography



B1 Satin Black



B2 Textured Black



M13 Anodized Silver



T6 Pewter




P9 Brushed Nickel




W13 Pearl Beige



W1 Yolk White



Z1 Satin Bronze



Z3 Textured Bronze




T4 Shimmer Gray



P2 Brushed Aluminum



W3 Textured White



W2 Gloss White



28435 Industry Drive., Valencia, California 91355
800-325-4448 / 661-257-0286
www.lightwayind.com • sales@lightwayind.com



Revision: 02/19/2025

MINW-LED

Construction:

- Housing and chassis is steel
- Diffuser UV-stabilized, high impact resistant, DR acrylic
- Accent bars and rings are extruded aluminum

Light Source:

- LED
- Dimming to 10% **Included**

Notes:

- Integral mounting plate; keyhole slots left and right
- Top and bottom white acrylic lens – standard
- Not all material and accent styles are available
- Optional lens cover (ALC) eliminates up/down light
- Optional photocell (21) increases fixture depth 1 ½"
- BUG Rating: B0 - U3 - G2
- UL and CUL listed **WET** location
 - Build America, Buy America Act Compliant
 - CRI > 90
 - Universal 120/277 volt standard
 - 5-Year Warranty on LED Components

Type:	
Job Name:	



MINW

Height - 16" - 20" - 26" - 38" - 50"

Width - 9"

Depth - 4"

MC - 8" - 10" - 13" - 19" - 25"



ORDERING INFORMATION

Example: MINW-920-LED-O2C-4-B-Z3-WSA

MINW

Size	LED					Kelvin	Cage	Finish	Diffuser	Options
		Watts	Source Lumens	Dimming	Energy Star					
						2 3000K	A	B1 Satin Black	WSA White Smooth Acrylic	DIM LED dimming driver (0 - 10v) Dimming to 10% (Included)
						3 3500K	B	Z1 Satin Bronze	Optional Cage Accents (See Page 2)	
						4 4000K	C	Z3 Text Bronze	Material	21 Photocell - Specify voltage 01 - 120 volt 02 - 277 volt
							D	W1 Yolk	S Solid	
								W2 Gloss White	P Perforated Screen	42 All Aluminum Construction
916-LED	O2C	18	2420	0-10v	NO			W3 Text White	M Wire Mesh	ALC Aluminum Lens Cover - See Notes
920-LED	O2C	18	2420	0-10v	NO			B2 Text Black	W Waffle Pattern	39 J-Box with knockouts on all sides
	O4B	29	4000	0-10v	NO			T4 Shimmer Gray	Style	Battery Backup Options (Available with 0-10v only)
926-LED	O2C	18	2420	0-10v	NO			M13 Anod Silver	SC Screen Complete	BB10 10 Watts (1170lm) for 90-Minutes
	O4C	36	4840	0-10v	NO			T6 Pewter	CC Center Complete	
938-LED	O3C	27	3630	0-10v	NO			W13 Pearl Beige	CH Center Half	
	O6C	54	7260	0-10v	NO			Optional (See Price List)	EC Ends Complete	
950-LED	O4C29	29	3412	0-10v	NO			P2 Brushed Alum	SF Sides Full	
	O4C	36	4840	0-10v	NO			P9 Brushed Nickel	CF Center Full	
	O8C	72	9680	0-10v	NO					



28435 Industry Drive., Valencia, California 91355

800-325-4448 / 661-257-0286

www.lightwayind.com • sales@lightwayind.com




Revision: 02/19/2025

MINW

Cage Styles and Accents

Cage Styles

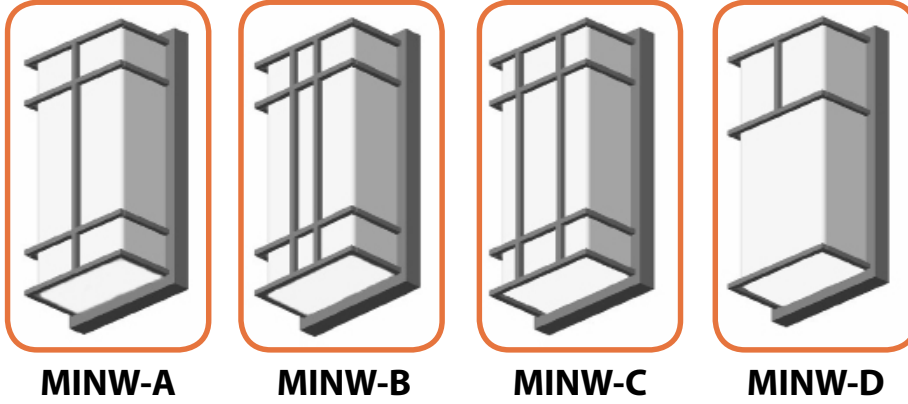

MINW-A

MINW-B

MINW-C


MINW-D

OPTIONAL CAGE ACCENTS

(Not required, leave blank if undesired)

1) Optional Accent Location

(Shown as "C" cage. Others are Similar)

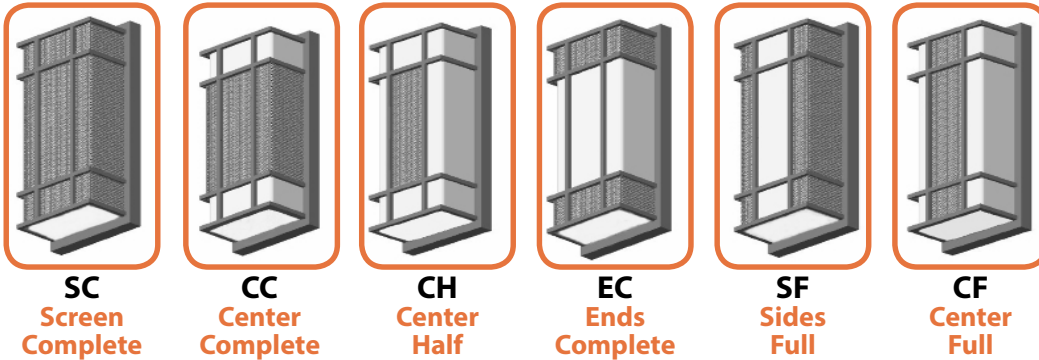

SC
Screen
Complete

CC
Center
Complete

CH
Center
Half


EC
Ends
Complete

SF
Sides
Full

CF
Center
Full

2) Accent Material

(Required if Accent is chosen)

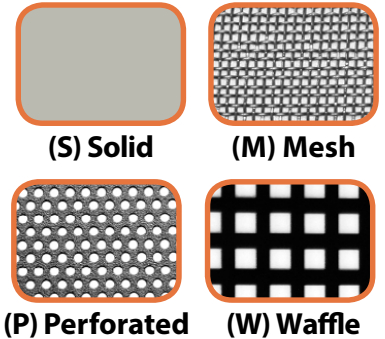

(S) Solid

(M) Mesh

(P) Perforated

(W) Waffle

ACCENT AVAILABILITY CHART BY CAGE STYLE

	A	B	C	D
SC	S,P,W	S,P,W	S,P,W	S,P,W
CC	S,P,W	S,P,W	S,P,W	---
CH	---	S,M,P,W	S,M,P,W	---
EC	S,P,W	S,P,W	S,P,W	S,P,W
SF	---	S,P,W	S,P,W	---
CF	---	S,M,P,W	S,M,P,W	---



28435 Industry Drive., Valencia, California 91355
 800-325-4448 / 661-257-0286 •
www.lightwayind.com • sales@lightwayind.com

